



TURBO

UNIVERSAL CULTIVATOR FOR ALL SEASONS

WHEN FARMING MEANS BUSINESS

Realising the full potential of farming is about growing and developing your business, not only your crop or livestock, but also your profit. Improve productivity and profitability by focusing on the positives and minimising disadvantageous aspects, through strong, dedicated management.

Success springs from determination and clear targets, from laying down the appropriate strategy and allocating correct investments for the future. Quality results require the right ideas and equipment. When there is work to be done, you need the optimal setup and smart solutions that support you towards an easier, more profitable way of working. You need solutions that make tough and demanding conditions less complicated.





TILLAGE

Preparing and cultivating your soil in order to achieve the highest possible yield is about choosing the correct tillage system.

YOUR KVERNELAND

INTELLIGENT FARMING SOLUTIONS

Choose the best farming solution for you and your land. Combine the highest possible yields with sustainability. This will start with the correct tillage. The choices you make depend on various factors and should match your specific circumstances, like soil structure, crop rotation, residue management, economic and ecological viabilities.

The choice is yours!

You must consider environmental and legal issues. From conventional methods to conservation tillage: the balance of operations at the right time has to be found to achieve high yields with the best soil condition (air, moisture, biological activity, etc.) with a minimum amount of energy, time and investment. For this, Kverneland offers a full range of intelligent farming solutions.

CONVENTIONAL TILLAGE

Conventional Tillage

- **Intensive** method of cultivation
- Complete soil inversion e.g. by a plough
- Less than 15-30% crop residues left on soil surface
- Seedbed preparation done by an active tool or special seedbed harrow
- High phytosanitary effect by reduced pressure of weed and fungi diseases - fewer herbicides and fungicides needed
- Better dry-off and faster increase of soil temperature for better nutrients absorption

CONSERVATION TILLAGE

Mulch Tillage

- **Reduced** intensity in terms of depth and frequency
- More than 30% of residues are left on soil surface
- Extended repose period of the soil
- Cultivator and/or discs incorporate the crop residues within the top 10cm of soil for stable bearing soil
- Full-width tillage - seedbed preparation and seeding in one pass
- Protection against soil erosion; reduce soil loss by run-off and improve water storage capacity.
- Improvement of soil moisture retention

Strip Tillage

- **Zonal strip loosening** before or during seeding of up to 1/3 of the row width (Loibl, 2006). Up to 70% of the soil surface remains untouched
- Strip-till combines the soil drying and warming benefits of conventional tillage with the soil-protecting advantages of no-till by disturbing only the area of the soil where the seeds are placed
- Exact fertilising deposit
- Soil protection against erosion and drought

Vertical Tillage / No-Till

- **Extensive** method
- Working soil vertically avoids additional horizontal layers or density changes
- Increasing water infiltration, root development and nutrient take-up
- Plants' roots dictate the overall health of the plant, as they deliver nutrients and water throughout the season, contributing to a higher yield
- A strong set of roots make plants more resistant to wind and drought.
- Lower energy input required





SPEED

STRENGTH

SIMPLICITY

EFFICIENCY



HIGH PERFORMANCE

SPEED UP WHEN THE TIME IS RIGHT

Speed

Depending on the season and conditions, you want to leave a rough surface or a fine seedbed. When the time is right, you need a machine that has the right capacity to finish the job. Tomorrow conditions may be worse, so speed is important, to relieve your time pressure.

Simplicity

You want a multifunctional cultivator and to be able to adjust it to the very specific conditions. For seedbed preparation, first and second stubbling operations. Adjustment of the Turbo is simple and operator-friendly.

Strength

You want a machine that lasts, that copes with the stress on the material over a long time. Still you don't want extra weight. With the automatic load transfer system of the Turbo, the pulling traction has been reduced. Better traction of the tractor means saving on fuel and tires.

Efficiency

Soil structure is not the same on every field. You want the best equipment for your specific conditions. We offer a large range of accessories to meet your requirements.

Perfect soil preparation at lower costs.

CULTIVATION AND SEEDBED PREPARATION

THE CULTIVATOR FOR ALL SEASONS

Powerful and efficient performance - that is what the Turbo offers. The machine can operate at high forward speeds whilst maintaining a consistent working depth.

With the Turbo, Kverneland provides a cultivator which is the right choice for all seasons, all kind of conditions and for a wide field of applications.

In fact, the Turbo range is dedicated to the following seasonal jobs:

In summer season:

- Stubble cultivation right after harvest
- Second or third pass to destroy weeds and volunteers saving herbicide

In autumn season:

- Preparing the soil for a fine crumbled seedbed able to enhance germination even for fine seeds like rape, grass etc.

In spring time:

- Opening the soil after frost or winter rainfalls, enhancing the air flow for quicker warming up
- Seedbed preparation in front of spring seeding, for example maize crops that need deeper cultivation for a good root development

Flexibility is key.



HIGH PERFORMANCE CULTIVATOR



Turbo T trailed in 6.50 and 8.00m
the high-end solution

Turbo fold 4.00, 5.00 and 6.00m
large working-width for higher output

Turbo mounted in 3.00 and 3.50m
width. Compact and powerful.

CULTIVATION FROM DEEP TO SHALLOW FULL RANGE AVAILABLE

The Turbo is the machine on the farm for establishing and making cultivation from 3cm to 20cm. Kverneland proposes different configurations depending of the conditions of use, but also the power ability:

- Turbo: 2 rigid models in 3.00m and 3.50m - up to 175hp
- Turbo F: 3 fold models in 4.00m, 5.00m and 6.00m - up to 300hp
- Turbo T: 2 trailed models in 6.50m and 8.00m - up to 450hp

The **mounted Turbo and Turbo F** have a very compact design to consider the lifting capacity of the tractor. Therefore the tines are staggered on 4 rows, and the first and last row of tines have been placed directly on the frame box sections. The row distance of the tines varies from 550 to 600mm for a low lifting capacity while ensuring a good soil flow. For instance, the 3.00m Turbo, the weight of the lighter model is around 1500kg in order to limit the required lifting capacity.

The **Turbo T** has a well organised tine arrangement over 5 rows. The capacity with long residues has really been a focus during the design process: The row distance varies between 775 to 1005mm; the tine position has been optimised to ensure a smooth soil flow across the entire working width but also around the transport wheels.

High performance at high speeds.

- Complete cutting
- Perfect mixing & levelling
- Low pulling force needed
- Wide range of rollers
- Reduced maintenance
- Flexibility from shallow to medium
- Large performance by high speed
- Stone protection

3 STEPS TO GET A FINE SEEDBED READY THE TURBO CONCEPT

On farms the Turbo becomes a reliable implement essential for all operations without making pans! The range of operations is versatile (3-20cm) from seedbed cultivation due to its narrow tine pitch to stubble cultivation due to the strong tine capacity and high underbeam clearance of 725mm. With the Turbo, you optimise the use of tractor horse power and maximise the performance at lower costs.



High quality soil cultivation.

1

Tillage the soil

The Kverneland Turbo is offering a 4 row configuration on the mounted machines and even 5 rows of tines on the trailed version. In combination with the 19cm tine distance, this leads to a nice mixing and finishing without the risk of blockages. The Turbo can be equipped with two different tines (Reflex tine or Triflex tine) and a variation of shares to adjust the machine to different conditions and tasks.

2

Levelling the soil

The Kverneland Turbo is offering the choice between a levelling tine and a disc system. Both units are spring-loaded and can be adjusted in their aggressiveness. Also the angle to the ground can be adjusted. In combination with special border equipment, a perfect levelling is achieved.

As an alternative to the rear roller a triple finger harrow can be mounted at the rear of the machine to ensure levelling and control of weeds development.

The front clod board, available for the trailed version, enhances crumbling on ploughed land and provides active levelling through the high vibration of the cracker tines.

3


Consolidating the soil


The third step of perfect seedbed preparation is soil consolidation. Therefore, a wide range of rollers are available to meet the various conditions and requirements. An additional following harrow for the right finishing can be mounted.

4

Seeding in one pass

Either an a-drill as integrated seeder with 200 or 500 l hopper volume or a distribution system in combination with the front hopper f-drill can be mounted to increase efficiency for cover crop seeding in one pass.

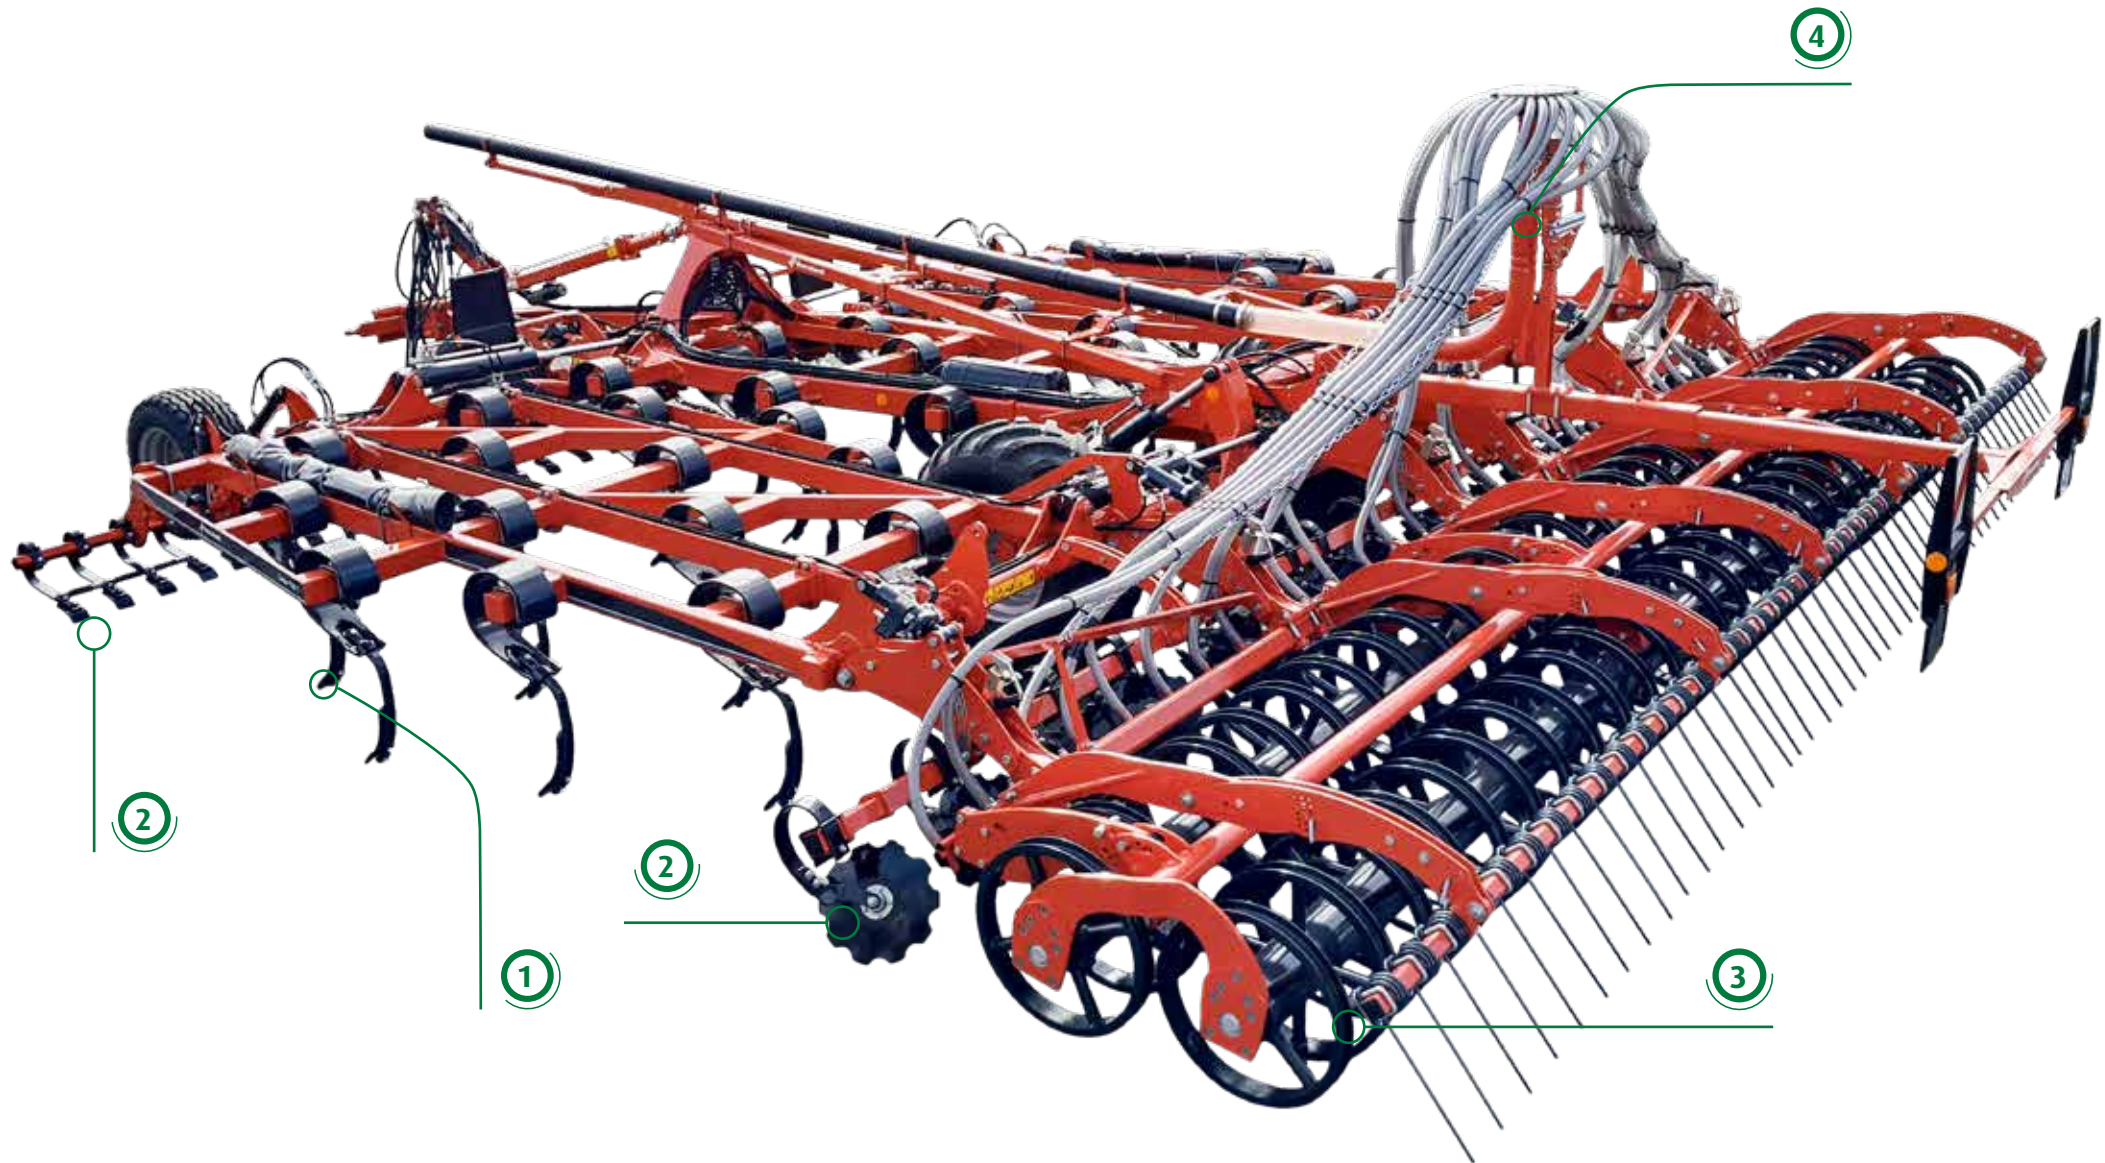

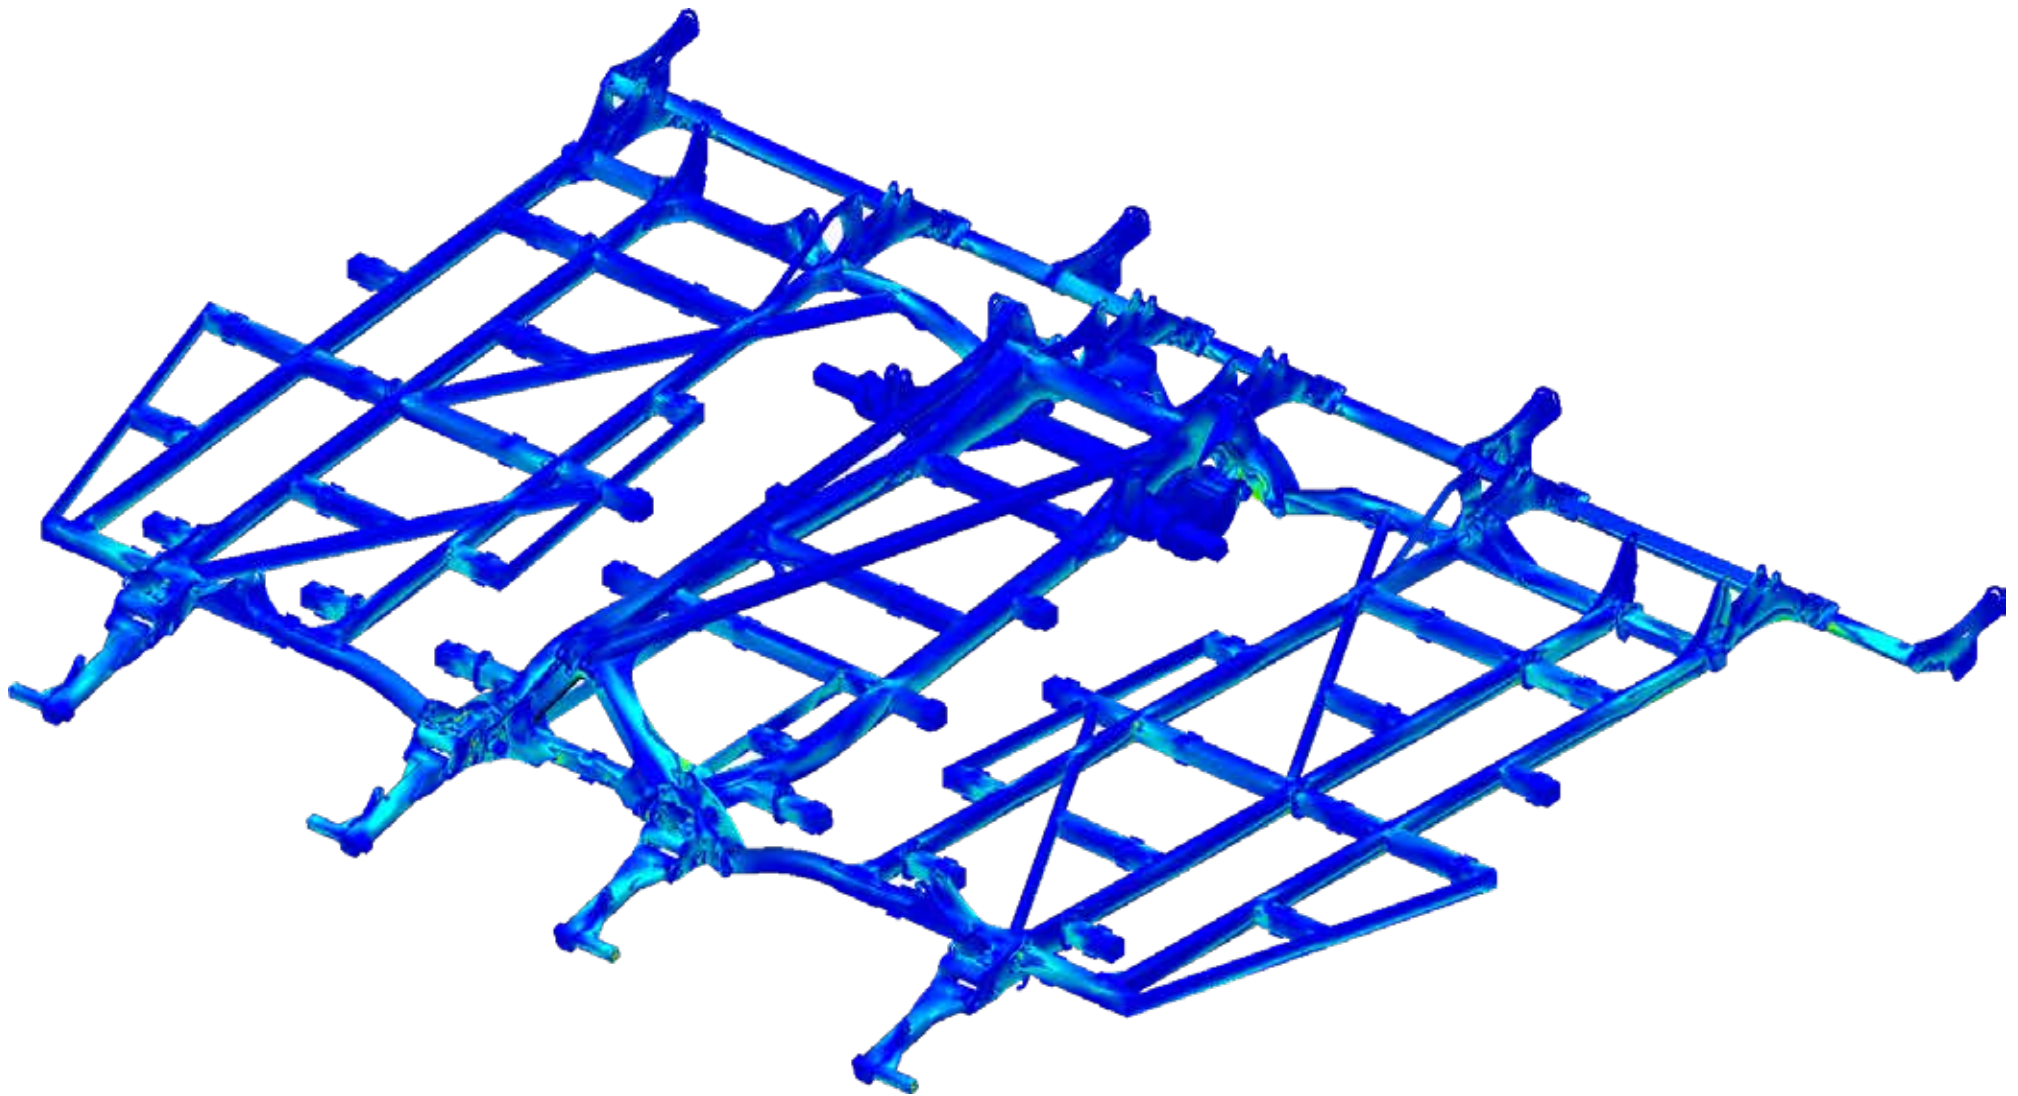

STRENGTH AND DURABILITY

ADVANCED TESTING PROGRAM

Before the Turbo was launched into the market, it had passed a whole series of tests to ensure the impeccable quality of the product.

- Sophisticated technologies are used for each development such as static load test, finite elements method (FEM) and shake-lifetime tests.
- Finally the machines are tested in the field under different conditions to reconfirm that the requirements to all functions and strength are met. A strict list of requirement (LOR) is defined to meet all kind of soil conditions.

Proven Reliability.

The frame is a result of a long study made by **FEM (Finite Element Method)** calculation to optimise the steel over the working width and proposing a strong structure able to resist to tractors up to 450hp for the trailed model, up to 300hp for the Turbo F and up to 175hp for the rigid frame.

The complete Turbo range has been designed to be combined with the Actipack roller, which is the heaviest roller in the range. All the most aggressive scenarios (deep working when turning, headland turns, transport tests, ...) have been considered to make the different frames as strong as possible and thus guaranteeing the proven Kverneland quality.

- **Strength**
- **Long lifetime**
- **Reliable design**
- **Proven performance**

USER COMFORT IS KEY

EASY ADJUSTMENT

Kverneland always focuses on safe operation and user comfort. With all the adjustments being done without the need for tools, a lot of precious time is saved!

Adjusting the Turbo for each season is easily done. The depth is adjusted by hydraulic cylinders and spacers; the levelling equipment by spindle. If the working depth is changed, there is almost no need to change the position of the levelling equipment thanks to the well-studied cinematic which acts like a parallelogram.

In addition, there is hardly any maintenance to be done on the Turbo apart from changing wearing parts. For farmers with small fields, narrow roads and who want to save time, the rigid Turbo can be equipped with a hydraulic folding system of the lateral levelling tines.

With up to 1,800kg improved traction.

Automatic Load Transfer (ALT) on Turbo T

With the Turbo T, Kverneland provides a cultivator which is easy to pull at low operating costs. A top feature of the Turbo T is the **Automatic Load Transfer (ALT)** system. With the front depth wheels acting like detectors, a sensor activates the load transfer system which transfers up to 1,800kg onto the drawbar. The benefit is up to **5% reduced slippage and savings of almost 900€ per year** (calculated on 1000ha acreage). Additional weight on the tractor (e.g. inside the rim wheels) becomes obsolete – reducing fuel consumption and wearing. The wheel wagon is placed inside the machine to ensure very short headland turnings of less than 10m. This also supports the positive weight transfer on the drawbar even when reversing with the heaviest rollers.

Turbo 1180 T (8.00m)	with load transfer	without load transfer
Slip (%)	10	15
Forward speed (km/h)	9.0	8.5
Realised ha/h	6.57	6.20

Saving calculation based on 1000ha/year	
Difference (ha/h)	0.37
Difference (ha/day) - 10h/day	3.65
Converted in hour - 10h/day	0,59
Cost of the tractor/hour - 350hp*	66.00€
DGPS (€/ha)*	5.00€
Drivers cost (€/h)	23.00€
Total tractor cost with driver (€/h)	94.00€
€ saving per day (tractor + driver)	55.29€
No. of hours (use/season)	161.25
No. of days of usage	16.12
Total savings per year	891.61 €

* Based on 500h/year



725MM

High underbeam clearance for blockage free operation

< 60MM

Rings and knives of the Actipack at less than 60mm distance!

190MM

Pich of 190mm for a perfect mixture and finishing.

≤ 1800KG

Best traction due to automatic load transfer (ALT) up to 1800kg to the tractor.



UP TO 200KG

Release force for high
vibrating effect and
selfprotection
face to stones

 **Kverneland** Turbo 3000

- **High vibration**
- **Intensive mixing and crumbling**
- **Constant cutting depth**
- **Low pulling force**
- **Deep and shallow**

HIGH VIBRATION FOR INTENSIVE MIXING AND CRUMBLING

REFLEX TINE: VERSATILE FOR ALL CONDITIONS

High vibration, narrow spacing, efficient crumbling



The **Reflex tine** benefits from high vibration effect: the large coil and the high tine clearance of 725mm gives a high flexibility whilst ensuring a high vibration effect to crack the clods and mix the soil. The working depth of the share stays even when the tine releases to the back thanks to its stable design. The narrow tine spacing ensures active crumbling and perfect levelling. Thus the pressure applied on the coil is reduced to extend its life time.

Most stable tine up to 20cm deep.

The Reflex tine is the perfect solution for using the Turbo in first/second stubble pass or for seedbed preparation. Also for the incorporation of slurry or manure the Reflex tine is the best choice. To make it even more flexible, three different shares are available to provide maximum flexibility for varying depth and soil disturbance. Two options of carbide shares are available, to increase farmers' productivity.

- Stable cut at shallow depth
- Vibration effect and high release force
- Stone protection

The share works only 7mm higher if the tine goes 150mm backwards.

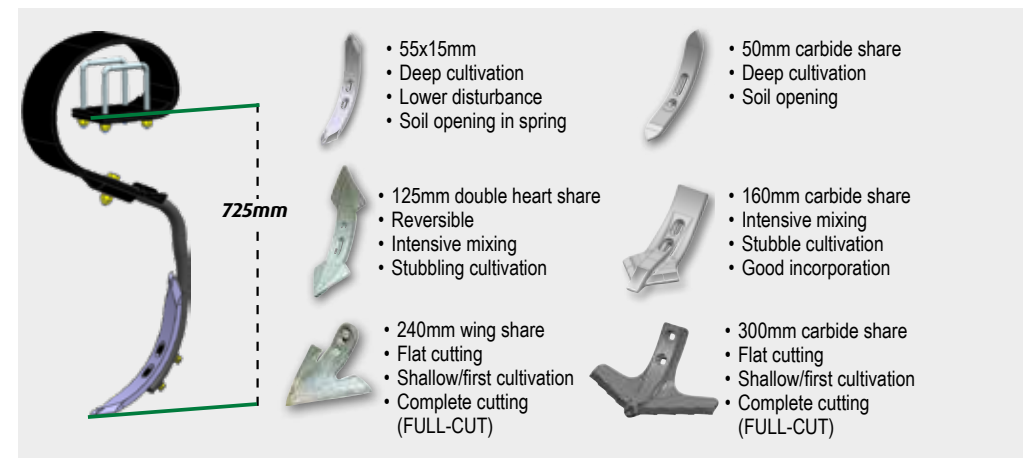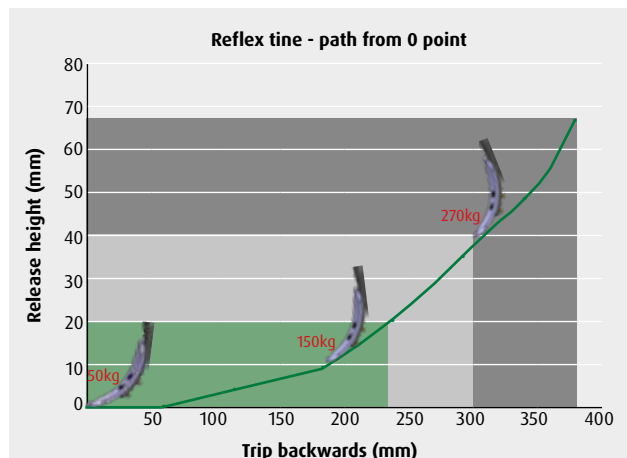



400KG

Penetration force

 **Kverneland Turbo 5000F**

- 400kg release force with Kverneland Triflex tine
- Proven overload-protection
- Intensive mixing and crumbling
- Constant cutting depth
- Deep and shallow - full share range
- Knock-on® system for fast share exchange

FOR STONY CONDITIONS AND HIGH PENETRATION




TRIFLEX TINE 400: HIGH STABILITY AT DEEP OPERATIONS

The auto-reset Triflex tine uses the well known **Kverneland leaf spring system** to ensure a high point pressure of 400kg in work and a smooth release curve when the tine hits an obstacle. The Triflex tine with narrow design and special shape reduces the pulling forces while ensuring a perfect penetration in most compacted soil. It is the perfect choice for deep loosening and working on heavier soil types strewn with stones.

Proven leaf spring and Knock-on® system.

The Triflex tine can be equipped with different shares to adapt to different working depths and tasks. 3 types of shares are available with the patented Knock-on® system. It is the easiest way of changing parts on a cultivator, either to adapt the machine to the job to be done or to change wearing parts.

KNOCK-ON

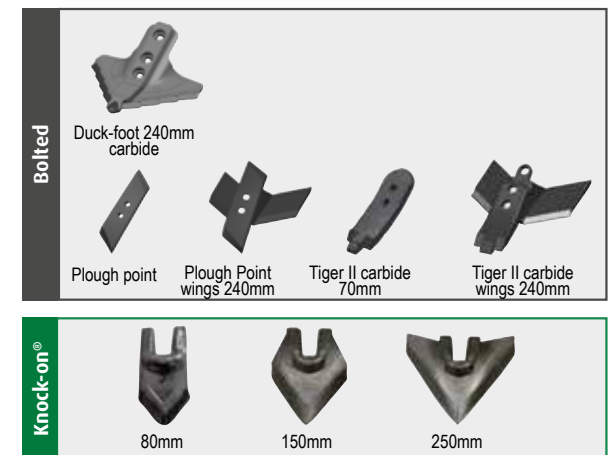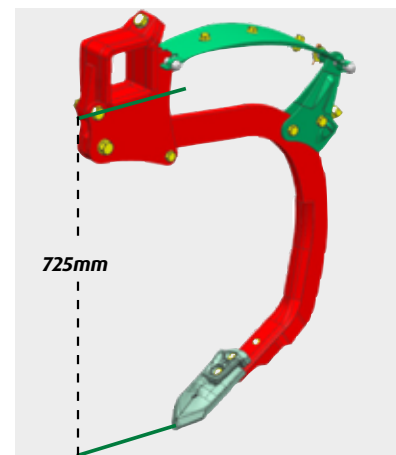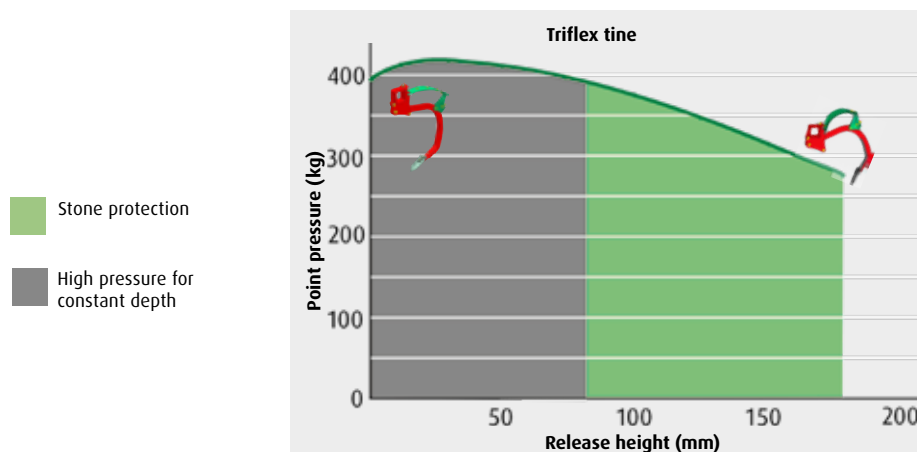

PERFECT LEVELLING

LEAVING AN EVEN SURFACE

In order to create an even surface for a fine seedbed, Kverneland offers different options of levelling tools for the Turbo. There are **levelling tines** which are a very easy and economic way of levelling and to handle normal straw conditions on light to medium soil types.

When it comes to heavy amounts of residues and also more clay or loamy soils the **levelling discs** are more suitable.

Both versions are overload protected by a spring to avoid damages in stony or other difficult conditions. Individual springs ensure individual release of tines or discs and keep levelling quality even in stony conditions. The pressure on this spring and also the angle of the levelling discs/tines can be adjusted for a perfect result.

The **clod board** in the front of the trailed models increases the crumbling effect on ploughed land and ensures active levelling due to the high vibration of the cracker tines. The aggressiveness of the clod board can be adjusted hydraulically from the cab on-the-go. In very wet conditions or if the levelling in front is not needed, the clod board bar can be easily lifted out of work.



LEVELLING DISCS



LEVELLING TINES




CLOD BOARD





Triple finger harrow						
Mounted Frame (m)	3.0	3.5	4.0	4.5	5.0	6.0
Dimension (mm)	L 750 x ø 16					
No. of finger harrow tines	32	37	42	48	54	60
Weight (kg)	390	420	622	652	684	710

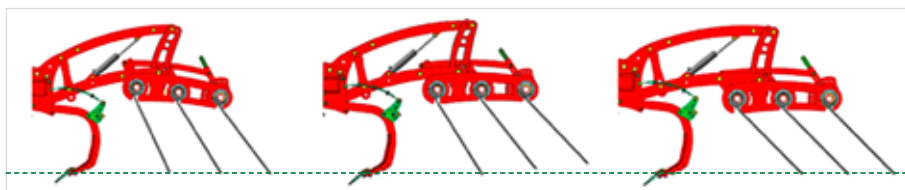

From light to heavy soil, always the right setting for perfect levelling.

TRIPLE FINGER HARROW

LEVELLING AND WEED CONTROL

A rear **triple finger harrow** is an option available on mounted Turbo version. It provides levelling and mechanical weed control by pulling the weeds out of the ground so that the roots dry out on the ground surface. This technique is particularly interesting for rhizome (quackgrass, bindweed ...), and other weeds that could grow again if pressed by a packer straight after cultivation. The triple finger harrow can be adjusted by the setting angle and the hydraulic pressure via the parallelogram according to conditions. When using the cultivator for seed bed preparation, the triple finger harrow will perfectly support the required crumbling and levelling effect.

The triple finger harrow is equipped with 750mm long fingers of 16mm diameter and individual spring-loaded protection. Depth wheels ensure the working depth of the cultivators.

The triple finger harrow is hydraulically suspended: the pressure on the ground can be adjusted directly from the cab. For larger amounts of straw or residues, the operator can lift the finger harrow on the go by increasing the pressure in the system at any time with a manometer on the headstock to control it. Alternatively, when the finger harrow is being used for crumbling, the driver can reduce the pressure in the hydraulic system to increase the pressure of the finger harrow on the ground for more intensive work.



SINGLE FINGER FOLLOWING HARROW

The single finger following harrow (Ø12 x 450mm) can be combined with all rollers. Interesting feature for shallow cultivation and mechanical weeding. The harrow also ensures an even levelled finish.

Mechanical weed control.



CONSOLIDATION





CONSOLIDATION FIRM SEEDBED

The roller on a cultivator is an elementary tool with different tasks:


- Supporting the working depth of the machine
- Consolidation of the soil to have best seed-to-soil contact
- Breaking of clods in order to have a fine seedbed
- Finalising the levelling of the surface

Cracking performance.

The choice of the right roller depends on the soil type and conditions. Also the lifting capacity of the tractor needs to be considered when looking for the right combination.

Depth control

The rear depth control of the Kverneland Turbo is adjusted via the roller equipment. The roller attachment concept enables the working depth to be easily adjusted by spindle. The levelling tine sections are simultaneously adjusted with the roller but can, if necessary, be fine-tuned.

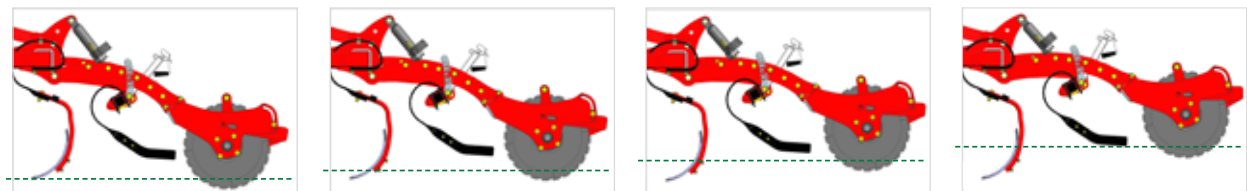

CONSOLIDATION

ROLLERS FOR ALL TYPES OF SOIL



Actipack Ø 560mm - 205 kg/m

- The Actipack roller displays its superb working qualities especially on medium to heavy soils and also in wet, stony and sticky conditions thanks to the independent skids and knives.
- The cutting discs break the larger clods whilst the adjustable knives cut the remaining clods resulting in optimal clod breakdown and fine seedbed preparation.



Actiring ø 540mm - 160 kg/m

- The Actiring roller is a lighter variant of the Actipack, using the same frame structure and knife system.
- The discs have been replaced by a "V" profile ring, this is saving 60kg/m, which is of critical importance for reducing lifting requirements for mounted equipment.
- Actiring is not recommended in stony conditions.



Actiflex ø 580mm - 160 kg/m

- The Actiflex roller has been made to create an intensive mixing with all types of conditions, even stony ones.
- The rings are made with spring steel to have a high resistance against stress at high speed.
- Actiflex rings are separated by skids to prevent any accumulation inside the roller.
- This roller is the ideal tool to create a nice seedbed and enhance the weeds regrowth after harvesting.



Work done with an Actipack/
Actiring roller: left side skids
lifted up (not active), right side
skids down in action.



Actipress Twin ø 560mm - 220kg/m

- Weight/m when full of soil: 250kg/m

- U-profile for high carrying/rolling capacity on light soils
- Clod breaking also in heavy conditions
- Possibility to make different soil profiles by locking the rocking (even or corrugated)
- Self-cleaning effect due to the twin u-ring concept
- Actipress Twin: High stability thanks to the oscillating frame
- High and homogenous consolidation
- Can also work in stony conditions
- Actipress Twin on trailed version: extended frame



Actipress Single ø560mm - 140kg/m

- Weight/m when full of soil : 170kg/m



Cage roller ø 550mm - 90kg/m

- 10 bars for a good loading capacity and operation in wet conditions
- Effective crumbling action



Double cage roller ø 400mm (tube/flat) - 160kg/m

- Good crumbling and levelling effect
- Precise depth control
- High carrying capacity

- **Operator-friendly due to maintenance-free bearings**
- **Protection against dust and water with 5 sealing lips**
- **Extended lifetime: Protection of bearings with an additional steel cover in heavier conditions like stones, twine, mud etc.**

SAFE ON THE ROAD EASY TO CONVERT

Easy conversion from working to transport position. The three-part hydraulic folding gives a transport width of 3.00m and ensures smooth running and safe road transport.

To respect the transport width on the Turbo mounted versions with 3.00m and 3.50m working width the outer tines/discs can be hydraulically or mechanically folded in.

The trailed Turbo models are homologated* at 40km/h in Europe.

* see local road regulations.



Improved seedbed preparation

Since switching to a Kverneland Turbo cultivator, Shropshire farming business RC Evans has noticed a big improvement in seedbed quality, which it expects to translate into higher yields. "We had been using a 3m cultivator on stubbles for min-till," says third generation family farmer Tom Evans, who handles daily duties at the 1,400-acre Curdale Farm at Cleobury Mortimer. An open day event at local dealer Murley Agricultural drew Tom's attention to the Kverneland Turbo cultivator.

"The Turbo looked like an useful machine, so we tried it on demo," he says. "Using the same tractor - a New Holland T7.235 - we could pull a 4m Turbo at 6-7in deep, at a speed of 8-9kph." Tom Evans says output has increased by around 40%, to 60 acres/day, enabling the farm to be more productive.

"We like to loosen our soils to promote aeration, improve drainage and to advance yields. It is now much easier to remove any wheelings and to aerate heavier soils," he says. "We've also used the Turbo to lift headlands after ploughing, and we've noticed it leaves an even, level finish - not just what you can see on top."

Tom Evans reckons seedbeds are better aerated and levelled after a pass with the 4m Turbo.





STUBBLING AND SEEDING IN ONE PASS ESTABLISHMENT OF COVER CROPS

The EU Green Deal aims to protect water resources and promote sustainability. One of the measures to prevent nitrate leaching into the water source is the systematic covering of soils with a plant cover in autumn. This cover absorbs nitrogen from the soil and air and converts it into organic nitrogen compounds. The cover then releases nitrogen to the next crop (1/3), improving soil structure, storing CO₂ and protecting the soil from erosion.

Integrated seed drill or in combination with a front hopper and distribution system

a-drill 200 (200l) used for rather small seed rate and **a-drill 500** (500l) preferred with higher seed rate (25 to 50kg/ha - mix of seeds, grass, etc.) have been designed to meet a rapid implementation of cover crop during stubble operations while minimising costs. In addition, the a-drill can also be used for establishing rape seed or mixtures of different diameters seeds (leguminous plant, cruciferous, etc.). Different dosing rotors and two types of fan: electric recommended for small seeds and allowing seed rates of 4 kg/min or hydraulic for rates up to 14 kg/min are available.

The Turbo can be fitted with one or two distribution head systems above the rear roller. When used with a front hopper like the f-drill with an ELDOS dosing unit, the seed is metered, conveyed, and distributed into the soil flow through a baffle plate, either before or behind the rear roller. Placing the seed before the rear roller or finger-following harrow ensures optimal seed-to-soil contact for connection to the capillary system. For shallow placement, positioning the seed behind the roller is ideal.





i-Tiller



TURBO T I-TILLER: SMART FARMING CULTIVATOR

DYNAMIC TRACTION CONTROL AND AUTO-PROTECT

The Kverneland Turbo T i-Tiller has been designed to provide the best working quality with the highest output, whilst ensuring the lowest costs of operation. For that reason, the depth- and levelling adjustments are directly controlled from the tractor cab by the ISOBUS terminal.

The working depth and the height of the levelling equipment are easily adjusted by pressing a button on the terminal. Automatically the Smart System of the Turbo T i-Tiller starts to set up all hydraulic cylinders! A front/rear depth adjustment can be done at any time and on the move depending on soil conditions.

The **On-The-Go Dynamic Traction Control** transfers weight from the front gauge wheels to the tractor coupling in order to give more grip and traction to the tractor. In hilly conditions, the pressure is constantly adjusted to maintain always the selected pressure. The result is less fuel consumption, less wearing of the tires by slipping control and a better soil structure by avoiding compactions.

The overload protection system **Auto-Protect** reacts to obstacles or lateral forces (right/left or both together). The Smart System lifts up the machine if values exceed a specific significant level e.g. if the operator misjudges the affected forces on the machine or misuses it by turning the machine without lifting or over reaching the highest pulling force. This guarantees a longer lifetime and a better second hand value.






TURBO T I-TILLER: SMART FARMING CULTIVATOR


AUTOMATIC SITE-SPECIFIC DEPTH CONTROL ON THE GO

In conventional farming systems, the entire field is cultivated at a uniform depth. However, the depth of compaction, soil types or soil moisture availability can vary greatly within a field. Site-Specific tillage, where the physical properties of the soil are only changed where cultivation is necessary for good soil structure and healthy plant growth, leads to economic savings and protects the environment.

With the GPS GEOCONTROL steering of the Kverneland ISOBUS Turbo T i-Tiller via applications maps all depth adjustments are completely self-steering which allows various depth settings within one field and increases operators comfort and efficiency. The sequence of actions inside the cultivator itself are synchronised. Depth guidance wheels in the front and the rear roller are in connection and automatic steered. The machine stays always parallel to the ground and acts as one section. Where the largest part of the machine is in a dedicated depth zone defined via the application map, the depth is taken.

Adapting the intensity of the cultivator to the individual conditions will increase the efficiency by saving fuel, extending the lifetime of wearing parts and of the complete implement. It also protects the soil, which contributes to sustainable farming.

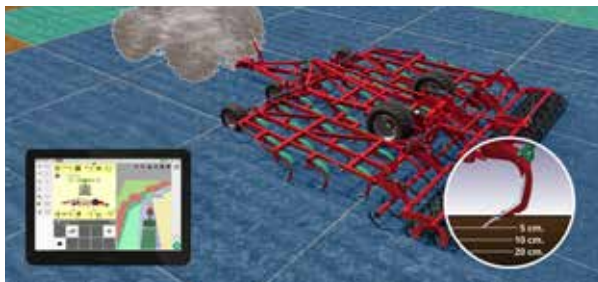

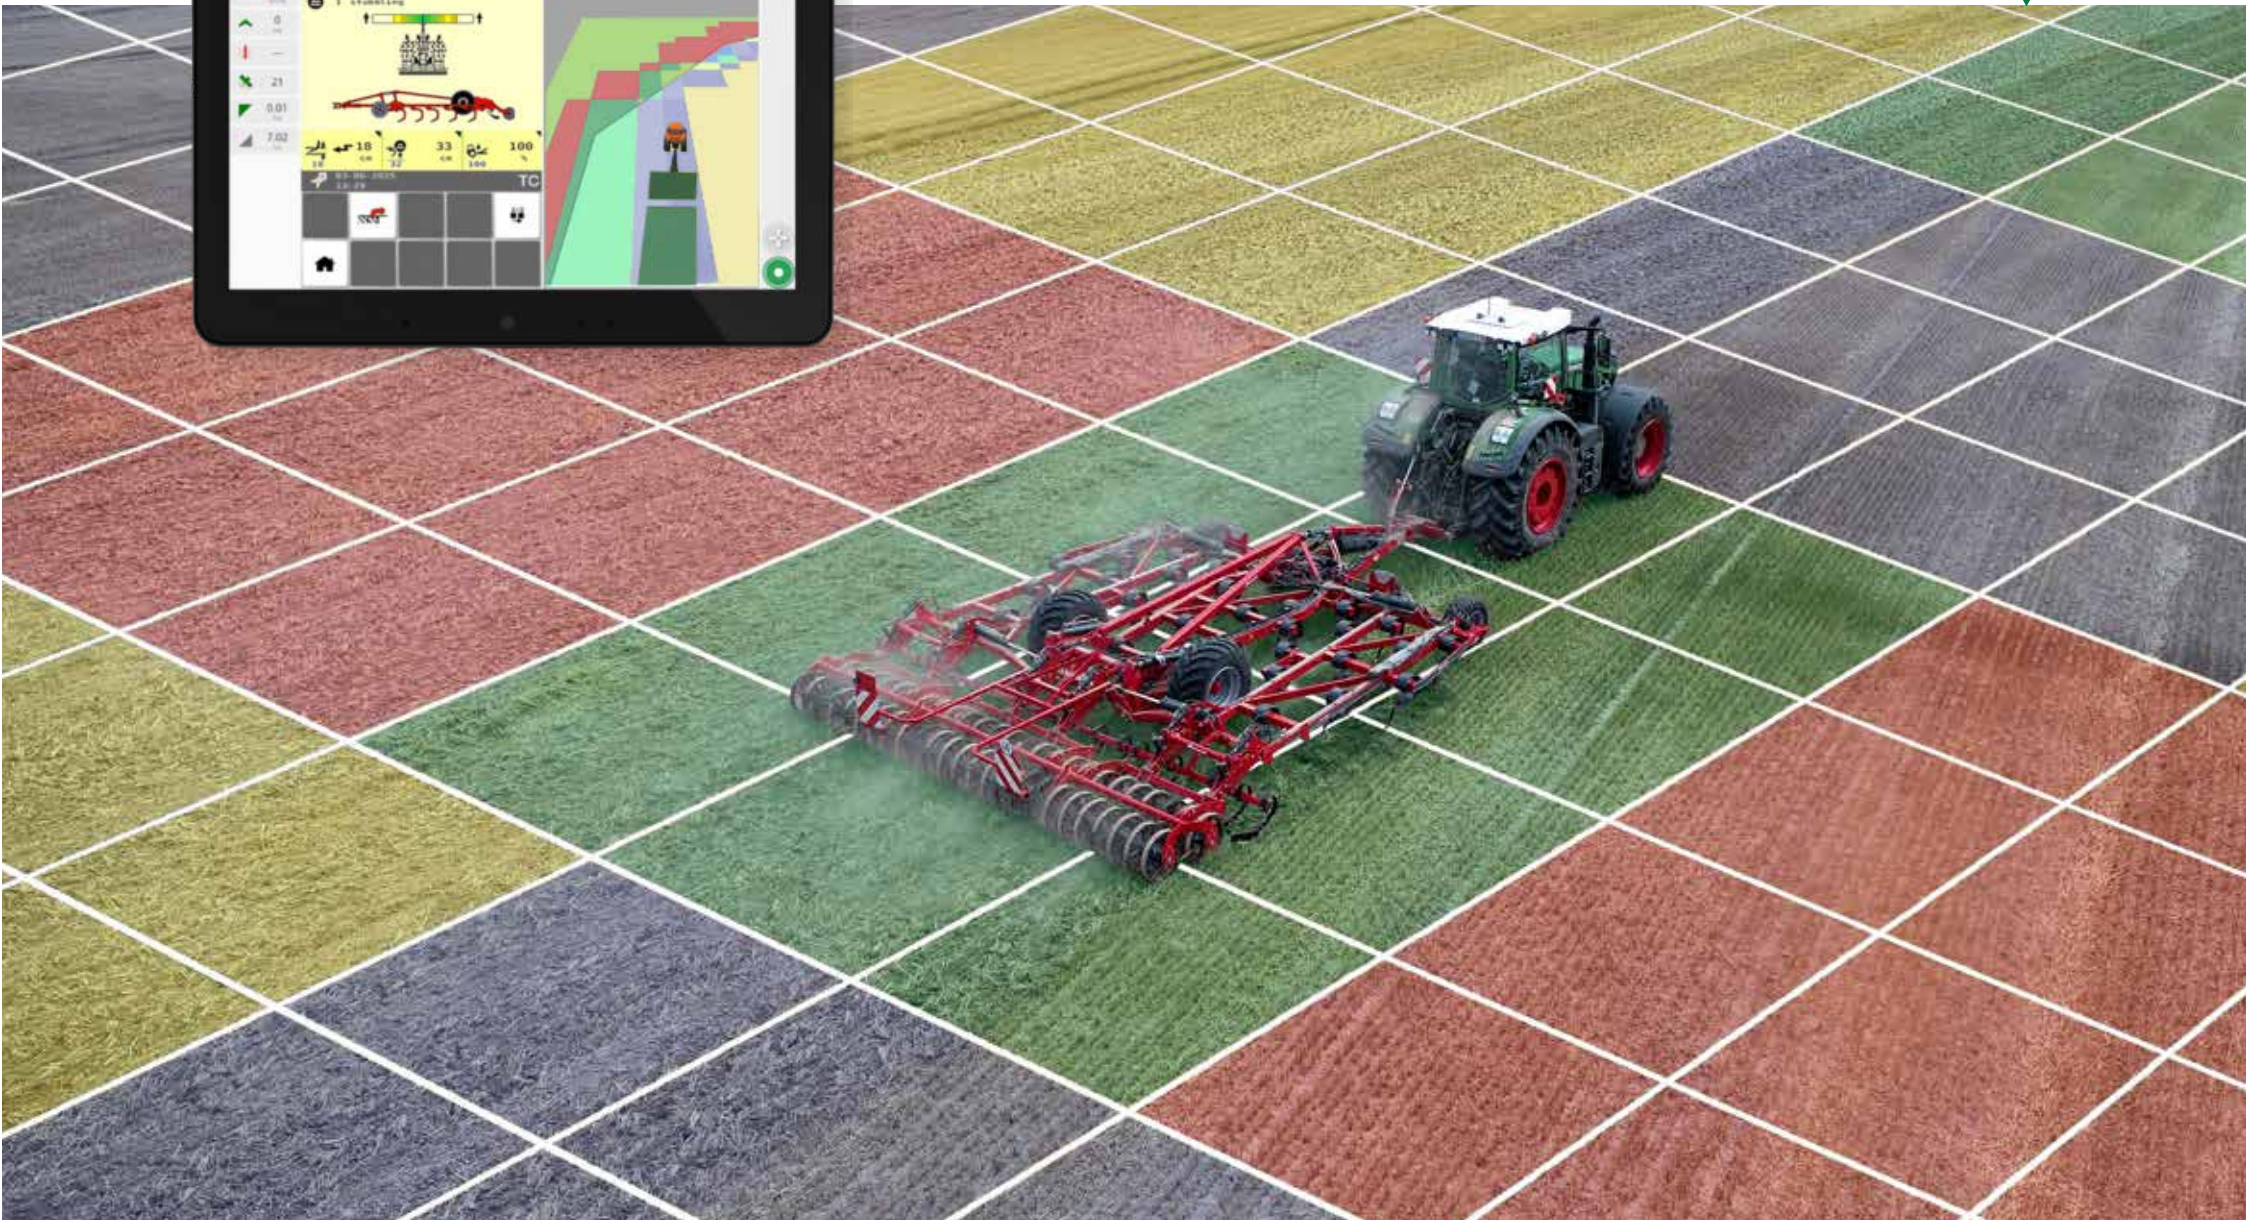



MANAGE YOUR FARM AS A BUSINESS WITH OUR ISOBUS PRECISION FARMING OFFERING

Our precision farming offering is essential in managing your farming business with success. Applying electronics, software, satellite-technology, online tools and Big Data enables you to use your farming equipment more effectively and reach higher profitability of your crops.



*iM FARMING - smart,
efficient, easy farming*

*Speed up on the path towards
connected agriculture.
We offer you numerous options
and solutions for how to produce
more with less; utilise inputs
more efficiently and thereby
increase profits and
sustainability.*

The best overview in farm management

IsoMatch FarmCentre is a cloud-based farm management tool that works seamlessly with Tellus 700 and Tellus 1200 terminals. It allows you to monitor machine activity, send tasks remotely to the terminal, and access real-time data and job reports - anytime, anywhere for smarter, more efficient farming.





Tellus 700 - Single Screen, Multiple Options

Tellus 700 simplifies precision farming with smart features, custom mapping, and a user-friendly design. With ISOBUS compatibility and flexible packages, it boosts in-field efficiency and control.



Tellus 1200 - Multiple Screens, Even More Options

Tellus 1200, the 12-inch universal Terminal offers intelligent monitoring and precise variable depth adjustment. With an intuitive interface and multi-screen functionality, it delivers smart, all-in-one control beyond standard tractor systems.



Kverneland Global 3

A precision GPS antenna delivering 30-50 cm DGPS accuracy for guidance, section control, and advanced farming - boosting efficiency and minimising overlap.

Kverneland Sync – the Implement Gateway

Always Connected – Easy and Direct

With Kverneland Sync, your implement stays connected to Kverneland online services, ensuring efficient, user-friendly data transfer to IsoMatch FarmCentre and Kverneland ServiceCentre.



Kverneland ServiceCentre

Minimize downtime with remote diagnostics via Kverneland ServiceCentre, enabling technicians to quickly resolve electronic issues from a distance.

Task Management

Enhance reporting and transparency with real-time tracking, performance measurement, and secure data storage in IsoMatch FarmCentre. Perfect for managing logistics and invoicing in machine cooperations.

GEOFENCING

Protect your implement against theft with GEOFENCING and a backup battery, ensuring localization even when the implement is not connected to a tractor.

ORIGINAL PARTS & SERVICE

LET'S FOCUS ON YOUR BUSINESS

ORIGINAL
PARTS

- 
- ① LONG LASTING - HIGH QUALITY SPARE PARTS
 - ② OVER 100 YEARS OF PARTS KNOWLEDGE
 - ③ SUPPORT FROM A WIDE NETWORK OF DEALERS
 - ④ 24/7 SPARE PARTS SERVICE
 - ⑤ HIGHLY SKILLED DEALER TECHNICIANS

MYKVERNELAND

SMARTER FARMING ON THE GO



A personalised online platform tailored to your machine needs

With MYKVERNELAND you will benefit from easy access to Kverneland's online service tools.

First hand access to information on future developments and updates, Operator and spare parts manuals, FAQs and local VIP offers. All info gathered in one place.

REGISTER YOUR PRODUCT NOW:
MY.KVERNELAND.COM

TECHNICAL DATA


Model	Turbo 3000	Turbo 3500	Turbo 4000 F	Turbo 5000 F	Turbo 6000 F	Turbo 1165 T**	Turbo 1180 T**
Frame	mounted rigid	mounted rigid	mounted fold	mounted fold	mounted fold	trailed	trailed
Number of tines	15	17	21	27	31	33	41
Working width (m)	2.82	3.19	3.94	5.07	5.81	6.18	7.68
Roller width (m)	3.00	3.50	4.50	5.50	6.00	6.50	8.00
Number of tine rows	4	4	4	4	4	5	5
Transport width (m)	3.00	3.50	2.90	2.90	2.90	3.00	3.00
Row spacing (mm)	From 550 up to 600					from 775 up to 1005	
Linkage	Cat. II & III					Cat. III & IV N, fixed eye, ball K80	
Underbeam clearance (mm)	725						
Regular tine spacing (mm)	190						
Depth adjustment	Hydraulic by spacers						
Levelling device	Levelling tines or levellings discs						
Clod Board	-	-	-	-	-	○	○
Triple finger harrow***	ø 16mm; Length 750mm						
Single finger following harrow	ø 12mm; Length 450mm (in combination with a roller) option						
a-drill	○	○	-	-	-	-	-
Distribution system in combination with a front hopper (f-drill)	○	○	-	-	-	○	○
Roller offering	Cage roller (ø 550mm), Double Cage roller (ø 400mm), Actiring (ø 540mm), Actiflex (ø 580mm) - not on trailed models, Actipack (ø 560mm), Actipress Single (ø 560mm) , Actipress Twin (ø 560mm) - not on 3.5m rigid & 6m fold						
Transport wheels	-					500/60 × 22.5 (2x)	
Gauge wheels	6.00x9 (2x)***			6.00x9 (4x)***		340/55 x 16 (4x)	
Brake	-					Hydraulic or pneumatic	
Min/Max HP	90/150	105/175	120/200	150/250	180/300	200/350	240/450
Total weight with cage roller (kg)*	1325	1460	2565	2955	3215	5845	6505
Total weight with Actiflex (kg)*	1540	1715	2863	3295	3645	6190	6900
Total weight with Actipack (kg)*	1720	1915	3129	3506	3981	6600	7400

* Weights are given as an indication.

** Trailed Turbo also as smart Farming ISOBUS cultivator Turbo T i-Tiller available

*** Triple finger harrow instead of the rear roller

● Standard ○ Option - Not available

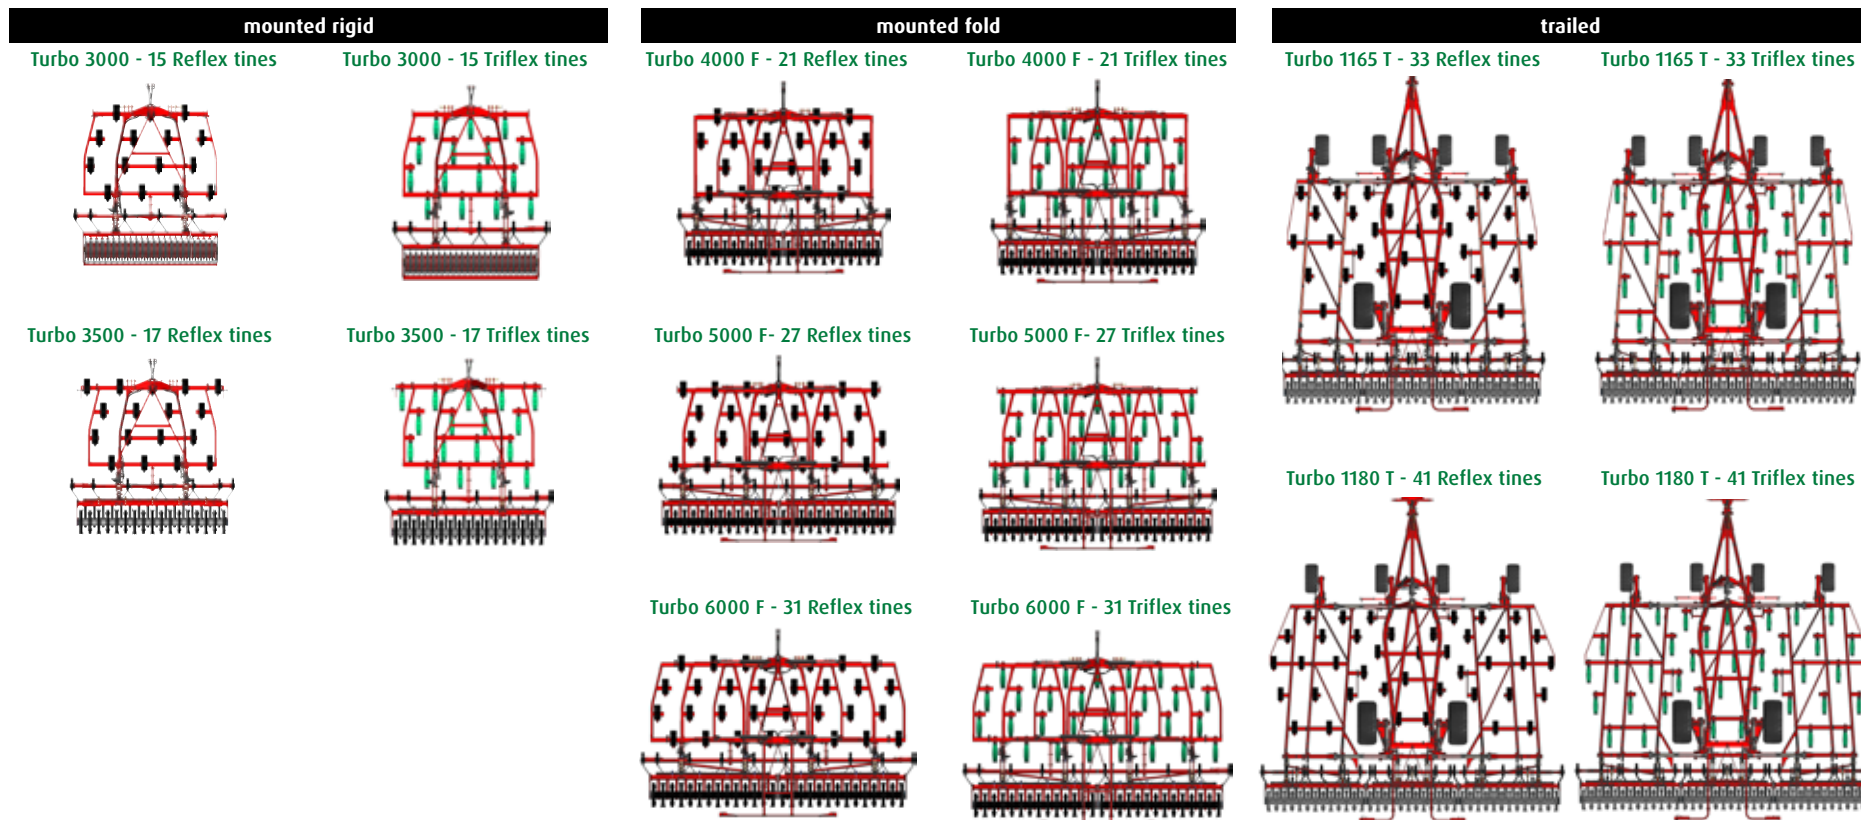

Information provided in this brochure is made for general information purposes only and for worldwide circulation. Inaccuracies, errors or omissions may occur and the information may thus not constitute basis for any legal claim against Kverneland Group. Availability of models, specifications and optional equipment may differ from country to country. Please consult your local dealer. Kverneland Group reserves the right at any time to make changes to the design or specifications shown or described, to add or remove features, without any notice or obligations. Safety devices may have been removed from the machines for illustration purposes only, in order to better present functions of the machines. To avoid risk of injury, safety devices must never be removed. If removal of safety devices is necessary, e.g. for maintenance purposes, please contact proper assistance or supervision of a technical assistant. © Kverneland Group Les Landes Génusson S.A.S.

WHEN FARMING MEANS BUSINESS

kverneland.com